

CALPICO T-CAPS

PRE-FILLED THERMITE WELD CAPS

COMPONENTS:

- Plastic igloo outer cover.
- Highly adhesive synthetic elastomer backing which adheres to metal.
- An igloo filled with a soft rubberized compound to flow around the weld and wire.
- Overall thickness: 125 mils.




TO SEAL MODEL T-CAPS:

Remove the release paper and press it manually over the thermite weld.

Normal size of T-Caps is 4" x 4" square; larger and smaller sizes are also available. Calpico T-Caps are ideal for covering the welds made on jumper cables, or when attaching anode wire to pipes or fittings.

Calpico T-Caps can be applied from 20°F to 130°F, with an operating temperature of -40°F to 180°F. It is advisable to apply Calpico #22 Primer before applying the T-Caps.

The primer comes in 12 oz. aerosol spray cans, as well as in one-quart liquid cans and one-gallon liquid cans.

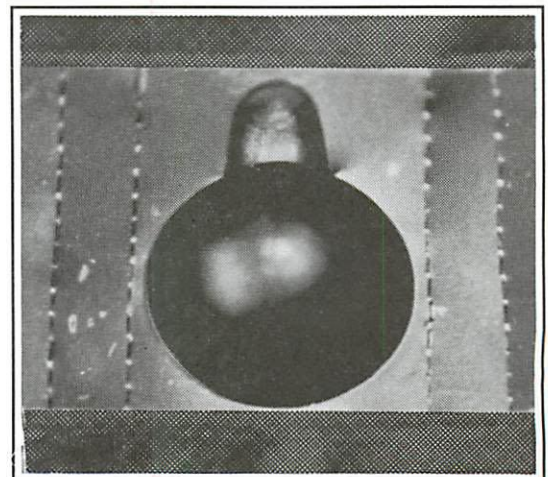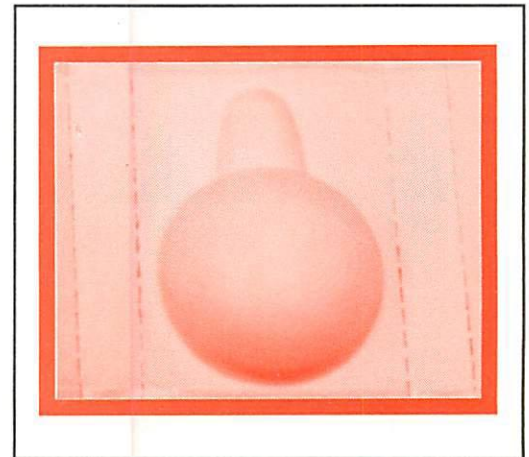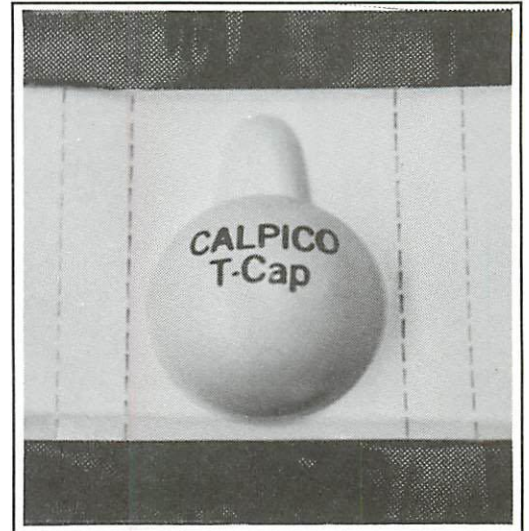

Distributed by:
Interprovincial Corrosion Control Co. Ltd.
930 Sheldon Court
Burlington, Ontario L7L 5K6
Telephone: (905) 634 7751
Fax: (905) 333 4313
Website: www.Rustrol.com