


INTERPROVINCIAL CORROSION CONTROL COMPANY LIMITED *(Since 1957)*

930 SHELDON COURT, BURLINGTON, ONTARIO
Regional Offices: Calgary, Alberta & Montreal, Quebec
TEL: (905) 634-7751 CENTRAL FAX: (905) 333-4313
www.Rustrol.com

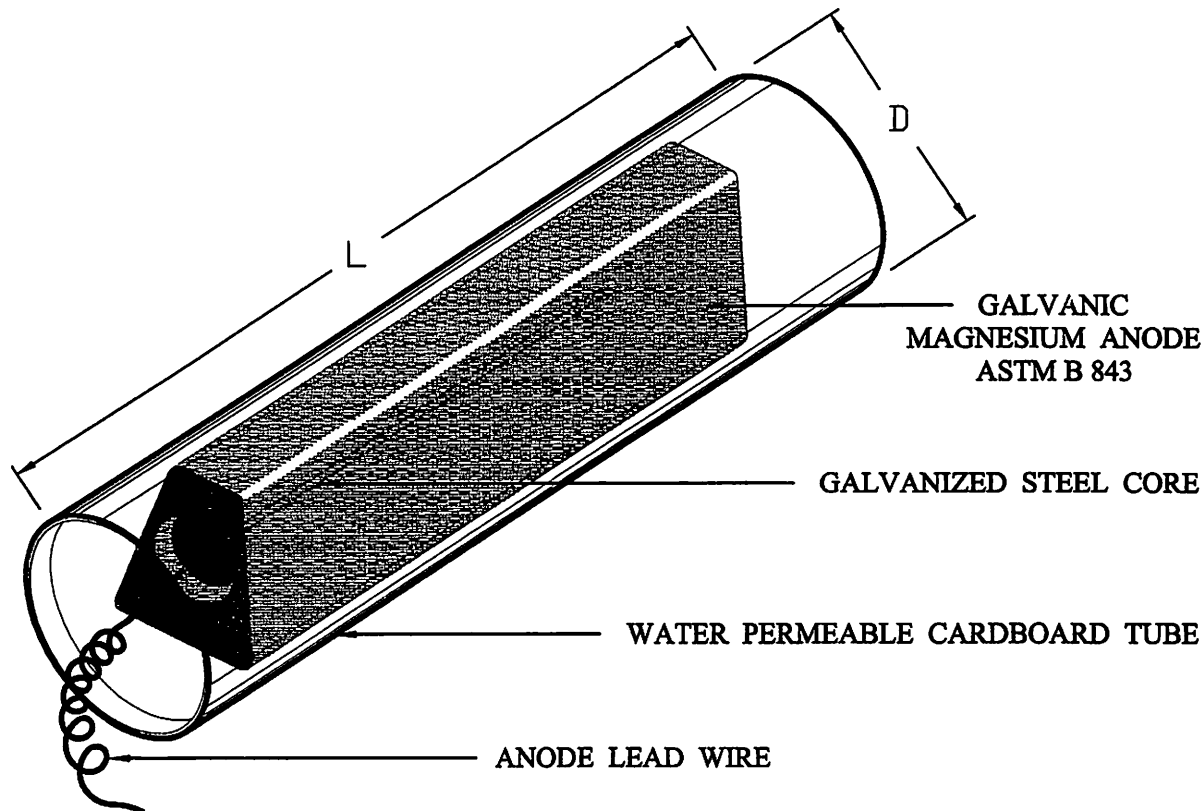

HIGH & REGULAR POTENTIAL MAGNESIUM ANODES

ICCC PRODUCT CODE	NOMINAL NET WEIGHT*		NOMINAL PACKAGED WEIGHT*		STANDARD PACKAGING <i>(Water Permeable Cardboard Tube)</i>			
	<i>(Magnesium)</i>				D		L	
	LBS	Kg	LBS	Kg	INCHES	mm	INCHES	mm
1D1½ G	1	0.45	N/A	N/A	N/A	N/A	N/A	N/A
3D3GG	3	1.40	11	5.00	5	125	10	255
5D3GG	5	2.30	16	7.25	5	125	14	355
9D3GG	9	4.10	20	9.00	5	125	18	455
17D3RP	17	7.73	35	15.90	5	125	30	760
17D3GG	17	7.73	35	15.90	5	125	30	760
17D2GG	17	7.73	59	26.75	5	125	53	1345
20D2GG	20	9.10	74	33.55	5	125	63	1600
32D5RP	32	14.55	80	36.30	8	205	28	710
32D5GG	32	14.55	80	36.30	8	205	28	710

* Nominal ingot and packaged anode weights ± 2% as stated above

ANODE LEAD WIRE: Typical 10' (3m) AWG #10/7 stranded copper lead wire with RW90 blue insulation,

**(Custom wire selection on request)*

GALVANIC BACKFILL: Benjamin Franklin Gypsum: 77% ± 2% **(Custom backfill mix on request)*

Wyoming Bentonite: 15% ± 1%

Sodium Sulphate: 8% ± 1%

MAGNESIUM ALLOY: Specification ASTM B 843 *(Latest edition)*

DATE	DETAILED	CHECKED	DWG. NO.	REV.
NOV 11, 2009	M.A.	C.O.	PD-17	6