


INTERPROVINCIAL CORROSION CONTROL COMPANY LIMITED *(Since 1957)*

930 SHELDON COURT, BURLINGTON, ONTARIO
Regional Offices: Calgary, Alberta & Montreal, Quebec
TEL: (905) 634-7751 CENTRAL FAX: (905) 333-4313
www.Rustrol.com

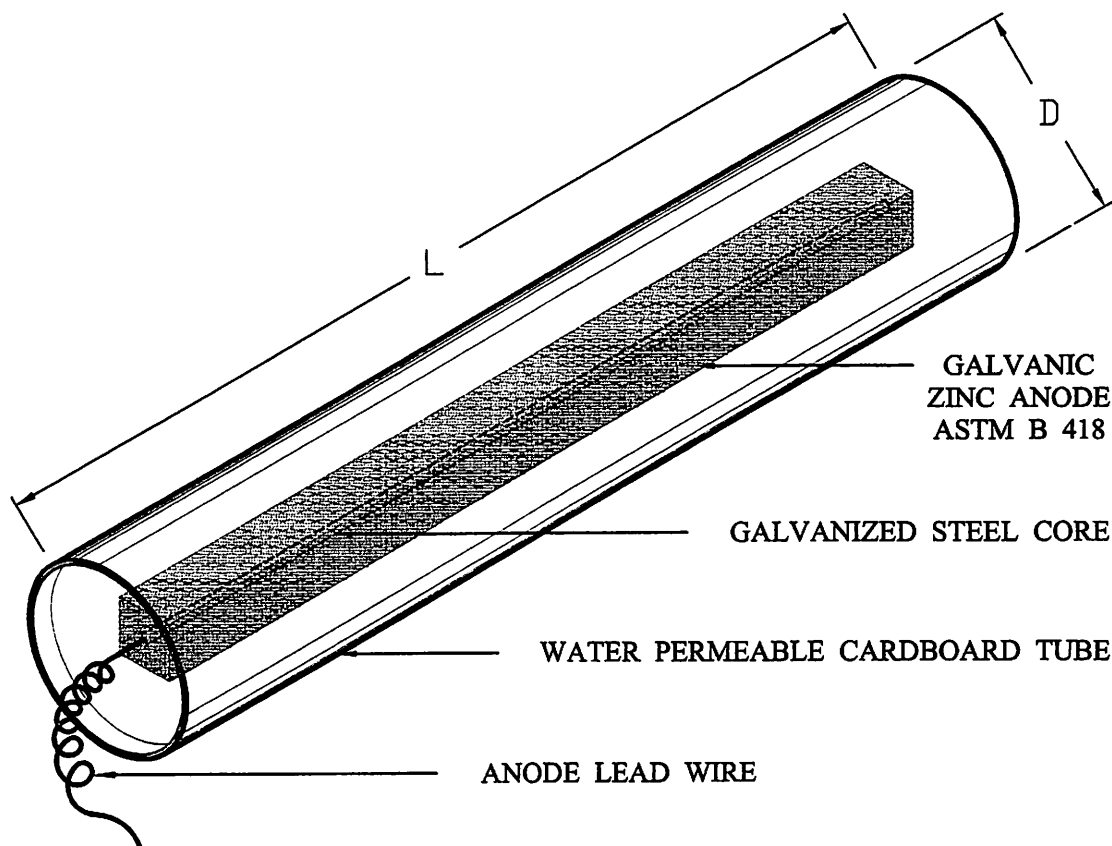

3" DIA. PACKAGED HIGH PURITY ZINC ANODES

ICCC PRODUCT CODE	NOMINAL NET WEIGHT*		NOMINAL PACKAGED WEIGHT*		STANDARD PACKAGING <i>(Water Permeable Cardboard Tube)</i>			
	(Zinc)				D		L	
	LBS	Kg	LBS	Kg	INCHES	mm	INCHES	mm
3S1.4ZP	3	1.40	6.5	2.95	3	75	10	255
5S1.4ZP	5	2.30	10	4.55	3	75	13 1/2	345
6S1.4ZP	6	2.73	12	5.45	3	75	16	405
12S1.4ZP	12	5.45	20	9.10	3	75	28	710
18S1.4ZP	18	8.20	30	13.60	3	75	39 1/2	1005
24S2.0ZP SHORT	24	10.91	35	15.90	3	75	36	915
24S1.4ZP	24	10.91	40	18.15	3	75	52	1320
30S1.4ZP	30	13.61	50	22.70	3	75	64	1625

* Nominal ingot and packaged anode weights $\pm 2\%$ as stated above

ANODE LEAD WIRE: Typical 10' (3m) AWG #10/7 stranded copper lead wire with RW90 white insulation,
*(Custom wire selection on request)

GALVANIC BACKFILL: Benjamin Franklin Gypsum: 77% $\pm 2\%$ * (Custom backfill mix on request)
Wyoming Bentonite: 15% $\pm 1\%$
Sodium Sulphate: 8% $\pm 1\%$

ZINC ALLOY: Specification ASTM B 418 (Latest edition), Type II

DATE	DETAILED	CHECKED	DWG. NO.	REV.
NOV 11, 2009	M.A.	C.O.	PD-19	5