

End Seals


Model "C" Custom Pull-on

Individually designed to accommodate custom carrier/casing combinations. Made of 1/8" thick, specially compounded synthetic rubber for long life and easy installation.




Model "W" Wrap Around

Specifically designed for existing installations. Simply remove plastic backing from self-curing rubber and press exposed surfaces together. Available for all carrier/casing differential.




Model "S" Standard Pull-on

Made of special synthetic rubber for long life and easy installation, the highly flexible "S"-shaped seal is available for ANSI steel pipe specifications. Band locating ribs are on the outside, with special sealing ribs on the inside under the band to prevent leakage.



Model "FW" Fire Resistant

This model has been developed exclusively for situations involving a need for fire retention. They are applicable to casing through dikes in tank farms, fire walls or wherever a casing may be in a fire prone area.

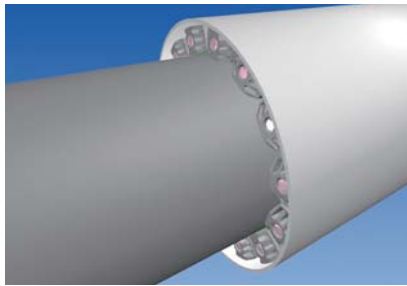

Link-Seal® Modular Seals

For a water tight seal (up to 20 psig [40 feet of head]) when the carrier pipe is already centered inside a casing. For added protection a model "C" end seal may be used in conjunction with Link-Seal® Modular Seals.

To Order Ranger II Casing Spacers Please Indicate:

1. Total Quantity of Spacers
2. Model No. (Ranger II)
3. Carrier Pipe O.D.
4. Casing Pipe I.D.
5. Bell O.D.
6. Runner Configuration
S = Standard Bell Clearance Only
CR = Centered/Restrained
7. Segment Size (Micro, Mini, Midi, Medi or Maxi)
8. Runner Lengths
9. No. of Segments/Spacer
10. Contact your local distributor or PSI

Compare Ranger II® spacer pricing versus older stainless steel technology. Request for quote PDF file available on-line.



PSI Metallic Casing Spacers (Painted, Coated or Stainless)

For pushes over 300ft long or for extra heavy - heavy wall pipes, please consider the use of PSI Metallic Casing Spacers. Consult with PSI factory personnel for additional details. Literature and specifications available for metallic spacers at www.pipeline Seal.com



Pipeline Seal and Insulator, Inc.

Ranger II® is a registered trademark of PSI.

©2008, Pipeline Seal and Insulator, Inc.
PSI-RII-11/08

Distributed By:
Interprovincial Corrosion Control Co. Ltd.
930 Sheldon Court
Burlington, Ontario L7L 5K6
Telephone: (905) 634 7751
Fax: (905) 333 4313
Website: www.Rustrol.com

