


INTERPROVINCIAL CORROSION CONTROL COMPANY LIMITED *(Since 1957)*

930 SHELDON COURT, BURLINGTON, ONTARIO
Regional Offices: Calgary, Alberta & Montreal, Quebec
TEL: (905) 634-7751 CENTRAL FAX: (905) 333-4313
www.Rustrol.com

SPLIT BOLT CONNECTORS

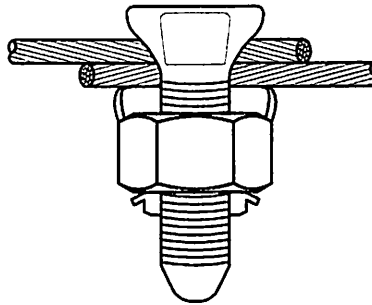

SELECTION CHART

PRODUCT CODE	DIMENSIONS						COPPER COND. RANGE FOR EQUAL RUN AND TAP	MIN. TAP WITH MAX. RUN	RECOMMENDED TIGHTENING TORQUE INCH LB.
	Cross Flats		L		W				
	INCHES	mm	INCHES	mm	INCHES	mm			
KS90	0.50	12.70	0.85	21.60	0.38	9.65	12 STR. - 10 STR.	16 STR.	80
KS15	0.50	12.70	0.85	21.60	0.38	9.65	10 STR. - 8 STR.	14 STR.	80
KS17	0.63	16.00	1.14	28.95	0.45	11.45	8 STR. - 6 SOL.	14 STR.	165
KS20	0.69	17.55	1.20	30.50	0.51	12.95	8 STR. - 4 SOL.	14 STR.	165
KS22	0.75	19.00	1.50	38.10	0.60	15.25	6 STR. - 2 SOL.	14 STR.	275
KS23	0.82	20.85	1.54	39.10	0.62	15.75	6 STR. - 2 STR.	14 STR.	275
KS25	0.94	23.90	1.77	44.95	0.73	18.55	4 STR. - 1/0 STR.	14 STR.	385
KS26	1.05	26.65	1.94	49.30	0.82	20.85	2 STR. - 2/0 STR.	14 STR.	385
KS28	1.36	34.55	2.07	52.60	1.17	29.70	1 STR. - 4/0 STR.	8 STR.	650
KS31	1.70	43.20	2.51	63.75	1.41	35.80	1/0 STR. - 350	1/0 STR.	650
KS34	1.82	46.25	2.79	70.85	1.48	37.60	2/0 STR. - 500	2/0 STR.	825
KS39	2.31	58.65	3.29	83.55	1.94	49.30	4/0 STR. - 750	4/0 STR.	1000
KS44	2.56	65.00	3.73	94.75	2.19	55.65	300 - 1000	4/0 STR.	1100

All dimensions are governed by Imperial Measurement

MATERIAL: High copper alloy

FEATURES: Assures a secure connection on all combinations of run and tap conductors
 High resistant to season cracking and corrosion

Thomas & Betts, Burndy or equivalent products are available for delivery.

Source: *Burndy Products Catalogue*

DATE	DETAILED	CHECKED	DWG. NO.	REV.
NOV 27, 2009	M.A.	C.O.	PD-23	0