

HANDLEY CATHODIC TEST STATIONS



2 Inch Cathodic Test Stations

4 Inch Cathodic Test Stations

2 Inch Monitoring Stations

2" Test Station Parts and Accessories,
2" Monitoring Station Parts and Accessories, and
4" Test Station Parts and Accessories



2 INCH CATHODIC TEST STATIONS

- The 15" ABS plastic box has a 2³/₈" I.D. and is available in either straight or flanged top for installation at grade level.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- "Adjustable to grade" test stations are available upon request.
- Terminal blocks are secured in place beneath the lid. Wires are automatically pulled up when the lid is removed.
- 0, 1, 2, or 5 terminals are available.
- All terminals are made of solid brass.
- Boxes are flared and squared to prevent pull-out, turning or settling.
- Cast iron lids are marked "Test". Plastic lids are marked "Test Station" and include a metal reflector for locating.
- One piece locking lids are standard. No parts to lose.
- You may order custom lids for an additional charge.
- A permanent "Real" magnet is in every box for easy location with electronic locator.
- Terminal Jumpers are available upon request.
- Test terminals can be incorporated with Handley valve boxes.
- Underground installation protects the station from vandalism and is esthetically superior. However, above ground test stations are also available.
- Test lids are available for marker posts. See marker post spec sheet to order.



HOW TO ORDER SUPERIOR GRADE 2" CATHODIC TEST STATIONS

Choose from the following categories to build the test station best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing.

ALL test station model numbers begin with **T2**.... continue to build your model number from the following categories:

T2


ONE = LID MATERIAL I = Iron P = Plastic	TWO = UPPER TUBE STYLE C = Plastic Flange Top with Iron Collar F = Plastic Flange Top H = Iron Heavy-Duty Flange Top S = Straight Top Flange	THREE = NUMBER OF TERMINALS 0 = 0 Terminals on a 2-Hole Board 1 = 1 Screw-(Terminal)-Type Terminal on a Board 2 = 2 Screw-(Terminal)-Type Terminals on a Board 3 = 1 Screw-(Terminal)-Type Terminal in the Wedge Nut 4 = 0 Terminals on a 5-Hole Board 5 = 5 Screw-Type Terminals on a Board 6 = 0 Terminals and No Terminal Board 7 = 1 Terminal in the Lid 8 = 2 Terminals in the Lid 9 = 5 Screw-Type Terminals on a Round Board
FOUR = LID COLOR (Black is Standard) A = Yellow D = Red B = Blue E = White C = Green F = Orange	FIVE = JUMPER 1 = One Jumper 2 = Two Jumpers	SIX = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group Two, Codes C, F and H)
SEVEN = MAGNET (One Magnet Located in the Tube is Standard) M = No Magnet At All N = One Magnet in the Wedge Nut (None on the Tube) P = Two Magnets in the Wedge Nut (None on the Tube)		EIGHT = TUBE DESIGN (15" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping, 18 ⁵ / ₈ " - 24", Flared R = Telescoping, 18 ⁵ / ₈ " - 24", Arched

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



4 INCH CATHODIC TEST STATIONS

- The 18" plastic box has a 4" I.D. and also is standard with a 1½" cast iron flange for heavy duty installation at grade level.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- "Adjustable to grade" test stations are available upon request.
- Terminal blocks are secured in place beneath the lid. Wires are automatically pulled up when the lid is removed.
- 0 or 5 terminals are available.
- 10 connections on 5 post-type terminals is also available.
- All terminals are made of solid brass.
- Boxes are flared and squared to prevent pull-out, turning, or settling.
- Cast iron drop-in or one-piece locking lids marked "Test Station" are available.
- Custom lids are available for an additional charge.
- Terminal jumpers are available.
- Test terminals can be incorporated with Handley valve boxes.
- Underground installation protects the station from vandalism and is esthetically superior. However, above ground test stations are also available.

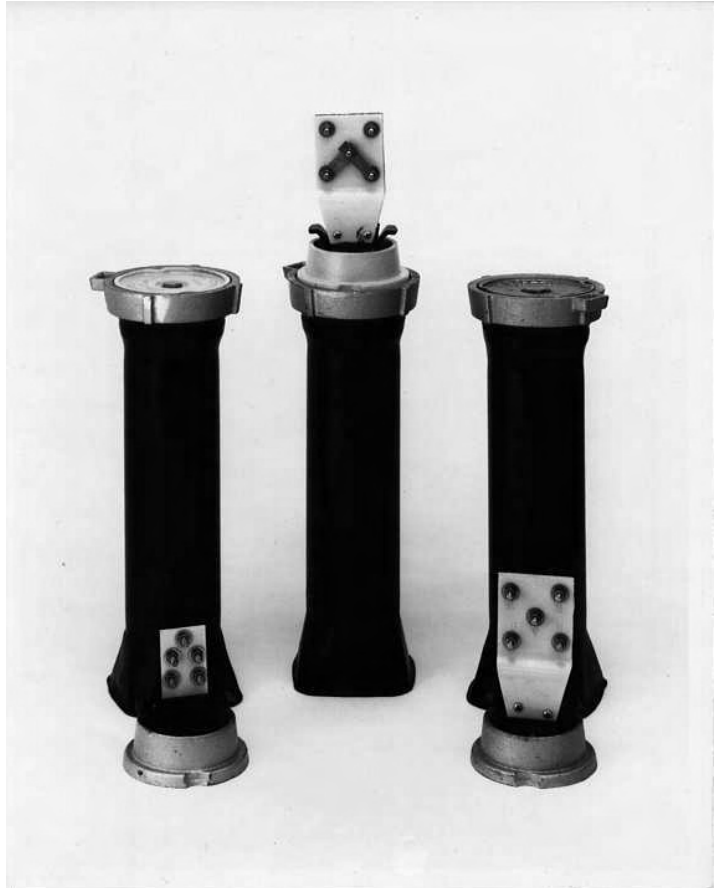

HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 4" CATHODIC TEST STATIONS

Choose from the following categories to build the test station best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing!

ALL test station model numbers begin with **T4**.... continue to build your model number from the following categories:

T4

<p>ONE = NUMBER OF TERMINALS 0 = 0 Terminals on a 2-Hole Board 3 = 5 Post-Type Terminals on a Board 4 = 0 Terminals on 5-Hole Board 5 = 5 Screw-Type Terminals on a Board 6 = 0 Terminals No Terminal Board 7 = 6 Screw-Type Terminals on a Board 9 = 5 Screw-Type Terminals on a Round Board</p>	<p>TWO = LID TYPE (Locking Lids are Standard) N = Non-Locking</p>	<p>THREE = JUMPER 1 = One Jumper 2 = Two Jumpers</p>
---	--	---

TUBE LENGTH IS 18"

LID COLOR IS SILVER

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



2 INCH MONITORING STATIONS

- Terminals on the outside of the lid provide fast, convenient test checks.
- Available with pre-wiring to outside terminals in the lid. One red and one black 15' coil of plastic coated, #12 AWG type THW, 600 volt, oil resistant solid copper wire is contained in the station.
- Wires easily uncoil to reach connection points.
- Stations with terminals but no wires is available.
- The 15" plastic box has a 2 $\frac{3}{8}$ " I.D. and is available in either straight or flanged top for installation at grade level.
- Made from SUPERIOR GRADE ABS plastic. It's long lasting and won't rust, rot or corrode.
- Adjustable to grade test stations are available upon request.
- Boxes are flared and squared to prevent pull-out, turning, or settling.
- Cast iron lids are marked "Test 1 2".
- You may order custom lids for an additional charge.
- A permanent "Real" magnet is in every box for easy location with electronic locator.
- Monitor lids available in marker posts. See marker post spec sheet to order.
- Underground installation protects the station from vandalism and is esthetically superior. However, above ground monitor stations are also available.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 2" MONITORING STATIONS

Choose from the following categories to build the monitoring station best suited to your personal needs.

ALL monitoring stations begin with **M2**.... continue to build your model number from the following categories:

M2

<p>ONE = UPPER TUBE STYLE F = Plastic Flange Top S = Straight Top Flange</p>	<p>TWO = WIRE N = Not Wired W = Wired</p>	<p>THREE = LID COLOR (Black is Standard) A = Yellow</p>	<p>FOUR = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group One, Code F)</p>
<p>FIVE = ARCHES AND TELESCOPING BOX (A 15" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping Box, 18⁵/₈" - 24", Without an Arch, Flared R = Telescoping Box, 18⁵/₈" - 24", With an Arch</p>			

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.



HANDLEY INDUSTRIES, INC.

HOW TO ORDER SUPERIOR GRADE 2" TEST STATION PARTS AND ACCESSORIES

PENTAGON WRENCH = PW

REPLACEMENT 2" ROUND TERMINAL BOARD = TBT29

REPLACEMENT LID = LIT2 & One Code from the Following Categories:

ONE = MATERIAL TWO = NUMBER OF TERMINALS

I = Iron

0 = 0 Terminals on a 2-Hole Board

P = Plastic

1 = 1 Screw-(Terminal)-Type Terminal on a Board

2 = 2 Screw-(Terminal)-Type Terminals on a Board

3 = 1 Screw-(Terminal)-Type Terminal in the Wedge Nut

4 = 0 Terminals on a 5-Hole Board

5 = 5 Screw-Type Terminals on a Board

6 = 0 Terminals and No Terminal Board

7 = 1 Terminal in the Lid

8 = 2 Terminals in the Lid

9 = 5 Screw-Type Terminals on a Round Board

THREE = COLOR

(Black is Standard)

A = Yellow

B = Blue

C = Green

D = Red

E = White

F = Orange

FOUR = JUMPER

1 = One Jumper

2 = Two Jumpers

FIVE = VENT HOLE

L = One 3/8" Vent Hole (Mandatory for Flange Top and Heavy Duty Test Stations)

SIX = MAGNET

N = One Magnet in the Wedge Nut

P = Two Magnets in the Wedge Nut

HOW TO ORDER 2" MONITORING STATION PARTS AND ACCESSORIES

PENTAGON WRENCH = PW

REPLACEMENT LID = LIM2 & One Code from the Following Categories:

ONE = WIRE

TWO = COLOR

THREE = VENT HOLE

N = Not Wired

(Black is Standard)

L = One 3/8" Vent Hole (Mandatory for Monitoring Stations with Plastic Flange Top)

W = Wired Plastic

A = Yellow

HOW TO ORDER 4" TEST STATION PARTS AND ACCESSORIES

PENTAGON WRENCH = PW

REPLACEMENT 4" ROUND TERMINAL BOARD = TBT49

REPLACEMENT LID = LIT4 & One Code from the Following Categories:

ONE = NUMBER OF TERMINALS

TWO = LID TYPE

THREE = JUMPER

0 = 0 Terminals on a 2-Hole Board (Locking Lids are Standard)

1 = One Jumper

3 = 5 Post-Type Terminals on a Board N = Non-Locking

2 = Two Jumpers

4 = 0 Terminals on 5-Hole Board

5 = 5 Screw-Type Terminals on a Board

6 = 0 Terminals No Terminal Board

7 = 6 Screw-Type Terminals on a Board

9 = 5 Screw-Type Terminals on a Round Board

